


# LED SOLAR STEP / WALL LIGHT

## User Manual



<1W / 20LM

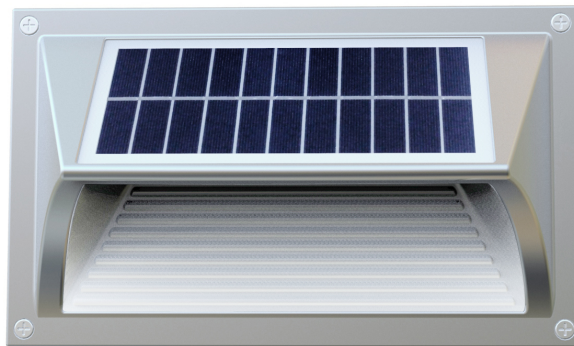

**RemPhos** by **Light Efficient Design**  
lighting on target


FOR LIGHT EFFICIENT DESIGN PRODUCT INFO CALL Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com  
FOR REMPHOS PRODUCT INFO CALL RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

01.15.2019 Information is subject to change without notice.

# Specification

|                        |                                            |
|------------------------|--------------------------------------------|
| Product Name           | RP-SSL-1W-40K-BK-GI                        |
| Power/Lumen            | 0.2W / 20LM                                |
| Dimension              | L 7.87IN x W 4.84INxH 2.5IN                |
| LEDS                   | SMD2835, 5PCS                              |
| Li-ion Battery         | Lastsatleast 1500cycles, 9.25WH            |
| Solar Panel            | 1W Poly Crystalline Silicon                |
| Working Mode           | Auto OFF in the daytime / Auto ON at night |
| Detection Angle/Area   | 120°/ < 16FT                               |
| Material               | AL+ABS                                     |
| Beam Angle             | 120°                                       |
| IP Degree              | IP65                                       |
| Install Height         | 9-10 FT                                    |
| Lifespan               | 35,000hrs                                  |
| Warranty               | 3 YEARS                                    |
| Packing                | 1*Solar Light,1*Screws Bag,1*User Manual,  |
| Battery Charging Temp  | 32°F~149°F                                 |
| Fixture Operating Temp | -13°F~149°F                                |

# Exploded view

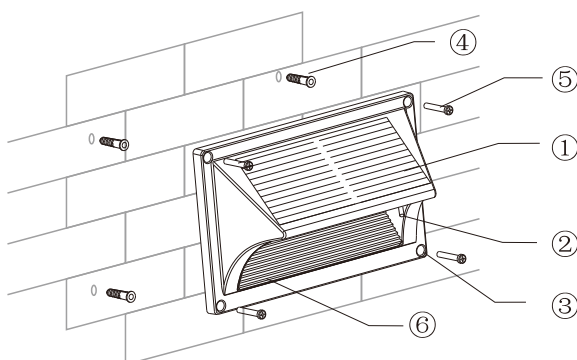


- ① Solar Panel
- ② The switch
- ③ Hole
- ④ Expansion Pillar-hinge
- ⑤ Screw
- ⑥ LED Light

**RemPhos** by **Light Efficient Design**  
lighting on target

FOR LIGHT EFFICIENT DESIGN PRODUCT INFO CALL Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com  
FOR REMPHOS PRODUCT INFO CALL RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

01.15.2019 Information is subject to change without notice.

## 3 Working Modes

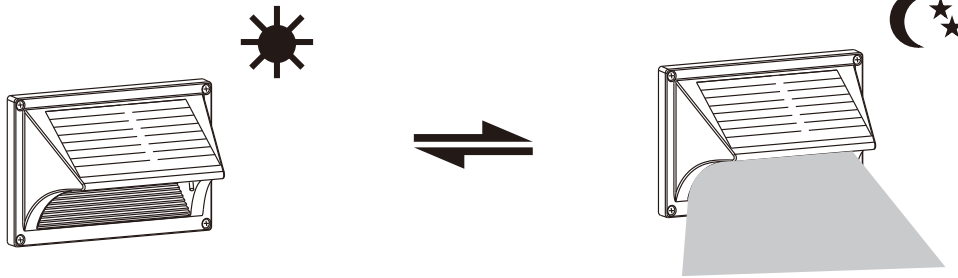

The light is automatically off in the daytime while the solar panel charges.

The light automatically turns on at night.

## Special Note

- ❖ Do not install the lamp away from the sun, under a shadow or between two buildings where the height of one building will affect how much light the product receives. Not installing with enough sunlight will lead to insufficient absorption of sunlight and insufficient brightness and time;
- ❖ Do not use the lamp in an environment with a temperature above 113 F or below 32F, otherwise the battery can be permanently damaged.
- ❖ Do not use non-standard installation accessories to install the lamp. This will void the warranty.
- ❖ Please be aware of your location to determine the most optimal mode for your satisfaction.

**RemPhos** by **Light Efficient Design**  
lighting on target


FOR LIGHT EFFICIENT DESIGN PRODUCT INFO CALL Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com  
FOR REMPHOS PRODUCT INFO CALL RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

01.15.2019 Information is subject to change without notice.

# Installation


1. Drill the hole according to the scale plate;
2. Fix the lamp on the wall with screw.

Tips: Keep the solar panel facing the sun to ensure a quality charge.

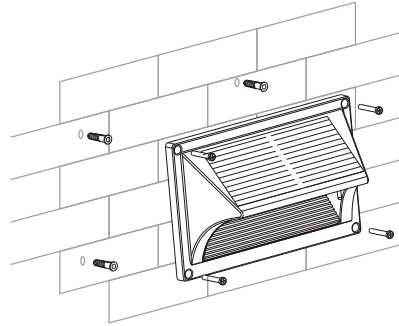

## How to unlock the working system?

Please use the supplied key pin to click the ON/OFF button from hole to turn on the light. The light will be off while click the ON/OFF button one more time.



## Notice & Warning

- ❖ Keep the device away from fire and oil to avoid any fire or explosion;
- ❖ No one except professional technicians should attempt to disassemble the light in order to avoid damaging the light;
- ❖ It is strictly forbidden to disassemble the battery for personal use;
- ❖ If the lamp doesn't get charge for 3 days, the battery maybe out of power, you have to charge it under bright sunlight;
- ❖ In order to ensure that the lamp works in an ideal state for a long time, please clean the solar panel regularly according to the local dust conditions, our suggestion is one time at least half a year.

**RemPhos** by **Light Efficient Design**  
lighting on target

FOR LIGHT EFFICIENT DESIGN PRODUCT INFO CALL Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com  
FOR REMPHOS PRODUCT INFO CALL RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

01.15.2019 Information is subject to change without notice.