

Version	2.0	Date	11/24/2021
Prepared By	J.C.		

PRODUCT SPECIFICATION

Category	Linear Vapor Tight
Item Number	9296
Stock Code	FXVTL40/48FR/840/347
Mounting	Surface / Ceiling / Chain
Housing Color	Gray + Frosted Lens

PICTURE



ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	40	Replacement Wattage (W)	2 x 32W T8
Tested Wattage (W)	40		
Input Voltage (V)	120-347		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.36 (@120V)	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	YES
THD	≤ 20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	5200	CCT (K)	4000
Efficacy (lm/w)	130	Beam Angle (°)	110
CRI	>80		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	-40 ~ 122
Storage Temperature (°F)	-40 ~ 122
IP Rating	IP66
Rated Life	50000 hrs.
Warranty	5 years

ACCESSORIES

Item #	Stock Code	Description
7336	BAEM4-60BC/MV-A	120V ~ 277V 4W EM Driver
7334	BAEM15-48BC/MV-A	120V ~ 277V 15W EM Driver
P10234	SEN-MC605V-D	120V ~ 277V Microwave Motion Sensor

PRODUCT DIMENSIONS

Width- in (mm)	5"
Height- in (mm)	3.7"
Depth- in (mm)	47.25"
EPA (ft²)	N/A
Weight (lbs.)	-
Mounting Height (ft.)	>7.8
Cable Length (ft.)	-

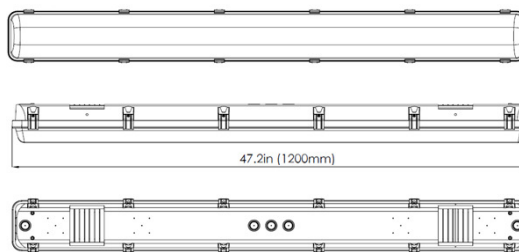

CERTIFICATIONS

UL/ETL	cETLus	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	V5.1 S	RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS