

EBX-OCT1-C

OCT1 (Octagonal Aluminum Back Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade : For ground, ceilings, walls, and stairs

• Wet, Damp, and Dry location

Components:

1. Plastic Cap
2. Flange - Please see below for flange & material options.
3. Base Plate - Aluminum
4. Box - Die-cast Aluminum

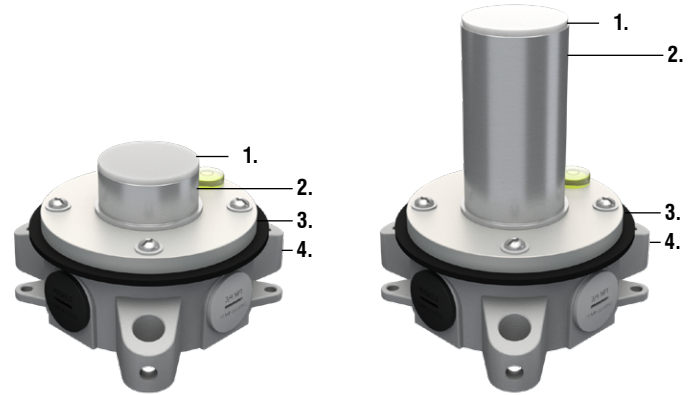

Flange Options & Dimensions



Aluminum Back Box with Standard Flange



Aluminum Flange (MA)
EBX-OCT1-CSMA



Stainless Steel 316 Flange (S6)
EBX-OCT1-CSS6

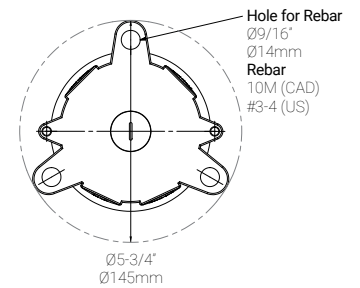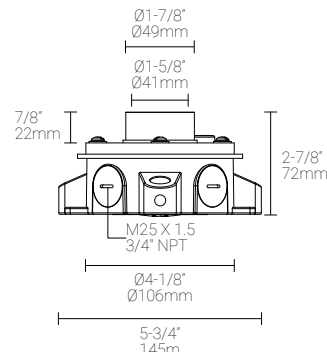



Aluminum Back Box with Paving Stone Flange



Aluminum Flange (MA)
EBX-OCT1-CPMA





Stainless Steel 316 Flange (S6)
EBX-OCT1-CPS6

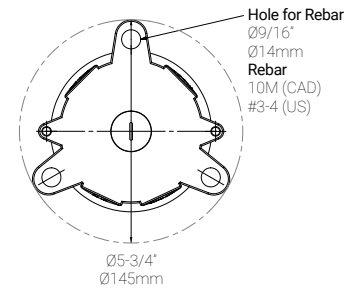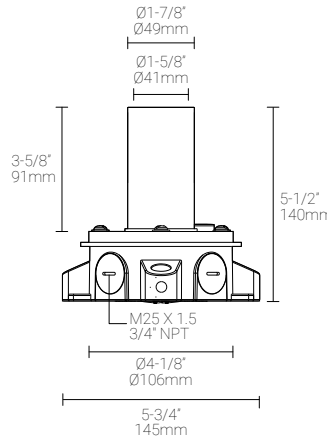

Aluminum Back Box with ABS Plastic Flange



ABS Flange and Base Plate (ABS)
EBX-OCT1-CSABS

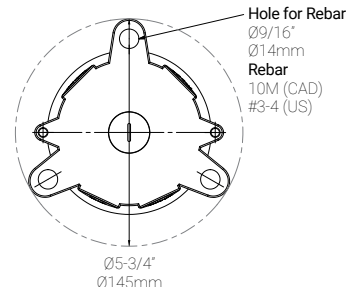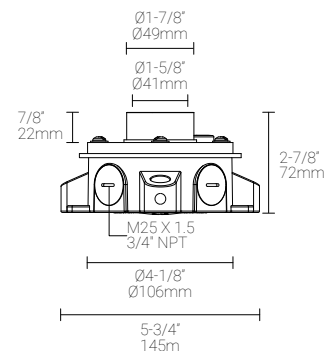

EBX-OCT1-C


OCT1 (Octagonal Aluminum Back Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade : For ground, ceilings, walls, and stairs

• Wet, Damp, and Dry location

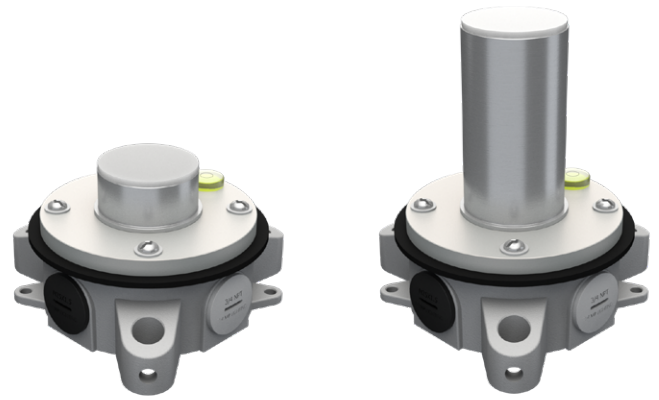

Compatible Fixtures

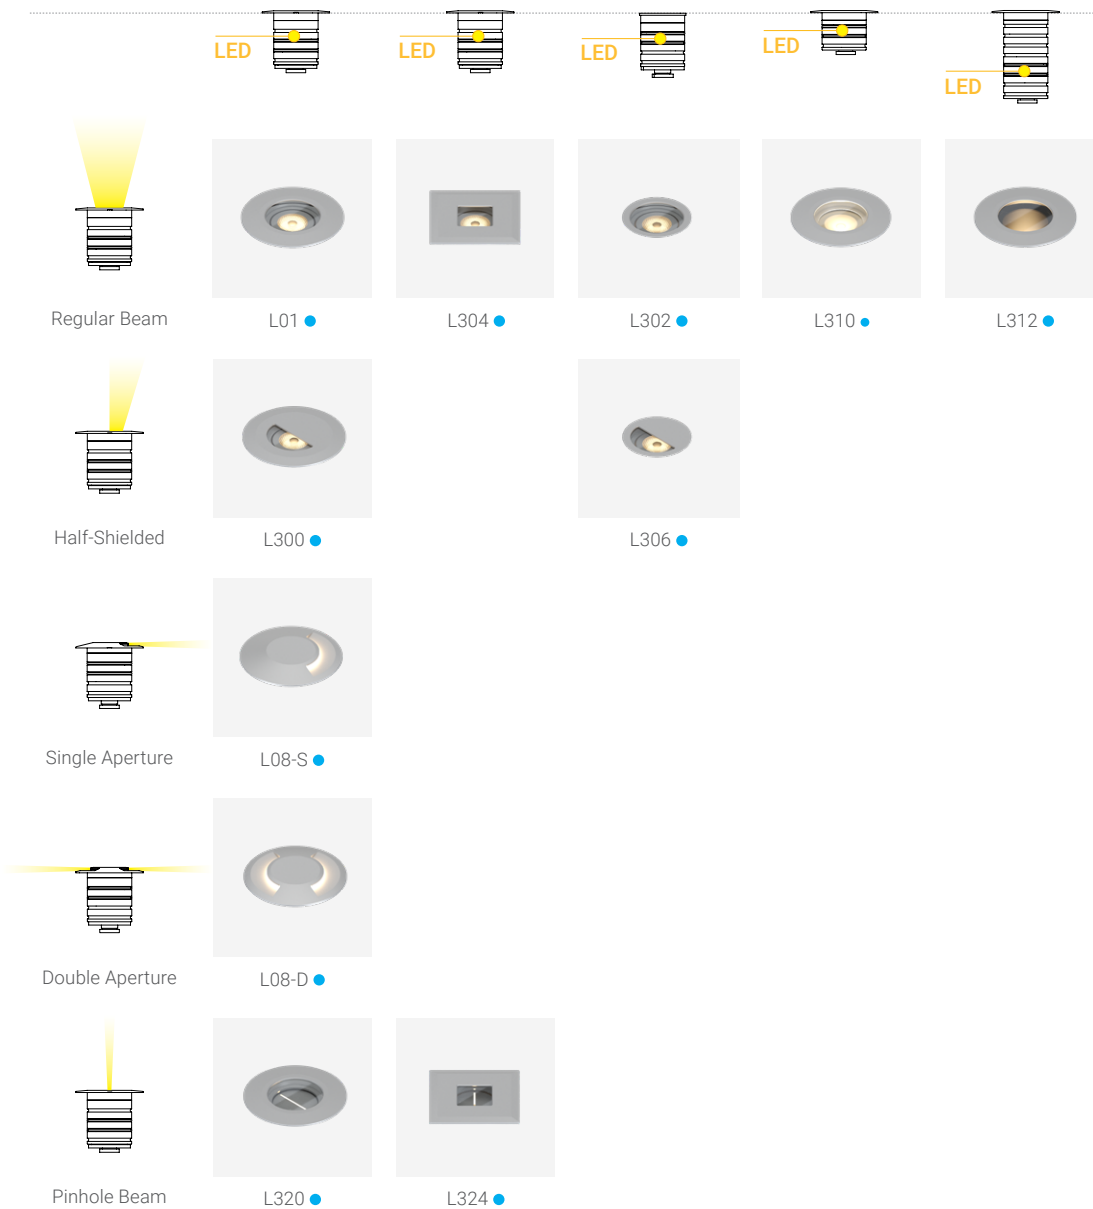

* EBX-OCT1-CPS6: Only available with 302(S6) and L306(S6)

* L310: Back box sold separately

* L312: Only available with Paving Stone Flange

EBX-OCT2-C

OCT2 (Octagonal Brass Back Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade : For ground, ceilings, walls, stairs. Typically used for coastal projects

● Wet, Damp, and Dry location

Components:

1. Plastic Cap
2. Flange - Please see below for flange & material options.
3. Base Plate - Brass
4. Box - Brass

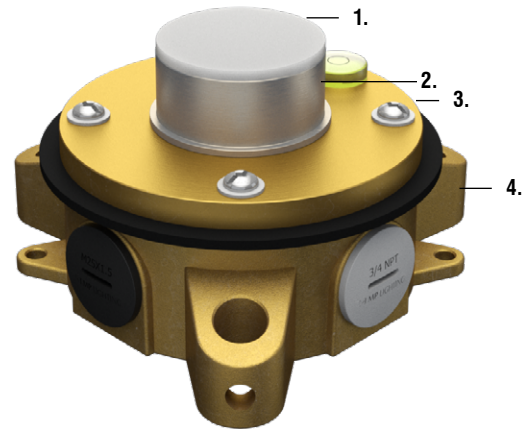


Flange Options & Dimensions

Brass Back Box with Standard Flange



Stainless Steel 316 Flange (S6)
EBX-OCT2-CSS6

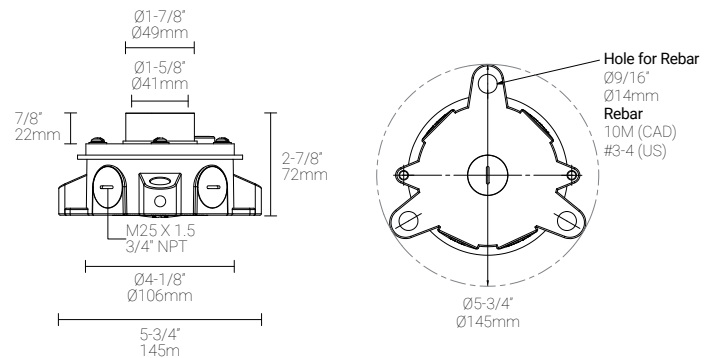

EBX-OCT2-C


OCT2 (Octagonal Brass Back Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)

Inner Diameter: Ø1-5/8" (41mm)

In-grade : For ground, ceilings, walls, stairs, and for coastal projects


• Wet, Damp, and Dry location

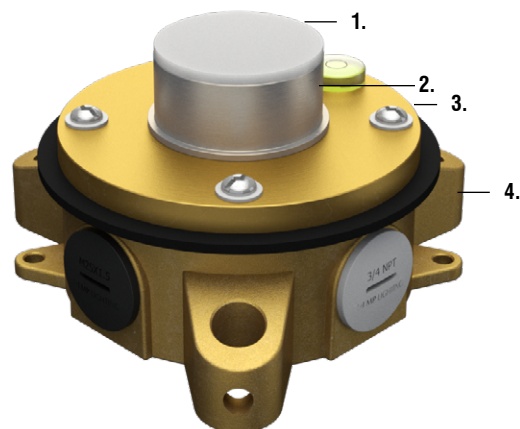


Compatible Fixtures




Regular Beam




L01 •



L304 •




L302 •




L310 •

Half-Shielded



L300 •




L306 •

Single Aperture



L08-S •

Double Aperture




L08-D •

Pinhole Beam



L320 •



L324 •

EBX-SQR1-C

SQR1 (Square Stainless Steel & Brass Back Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade | Submersed under water up to 10' (3m) depth.

- Underwater/Swimming Pool Certified


Components:

1. Plastic Cap
2. Flange - Stainless Steel 316
3. Base Plate - Brass
4. Box - Stainless Steel 304

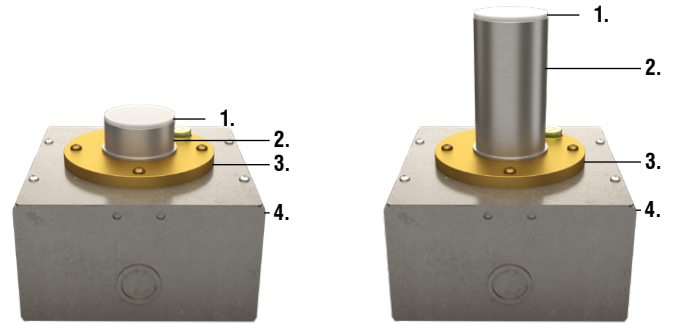


Flange Options & Dimensions


Stainless Steel 304 Back Box with Standard Flange

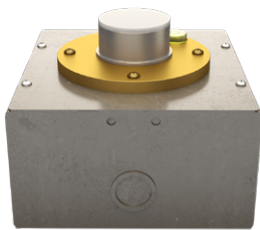


Stainless Steel 316 Flange (S6)
EBX-SQR1-CSS6



Stainless Steel 304 Back Box with Standard Flange

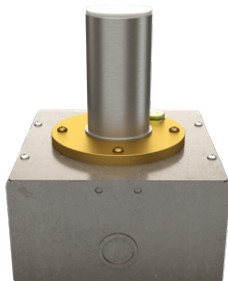

Stainless Steel 316 Flange (S6)
EBX-SQR1-CPS6

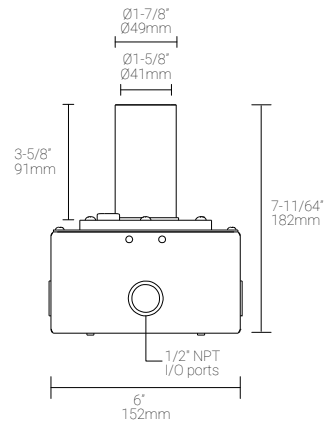

EBX-SQR1-C


SQR1 (Square Stainless Steel & Brass Back Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade | Submersed under water up to 10' (3m) depth.

- Underwater/Swimming Pool Certified

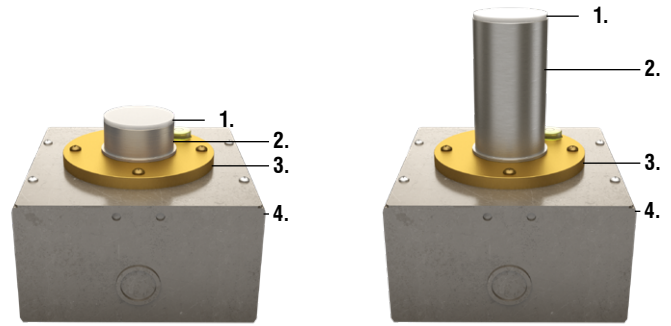

Compatible Fixtures

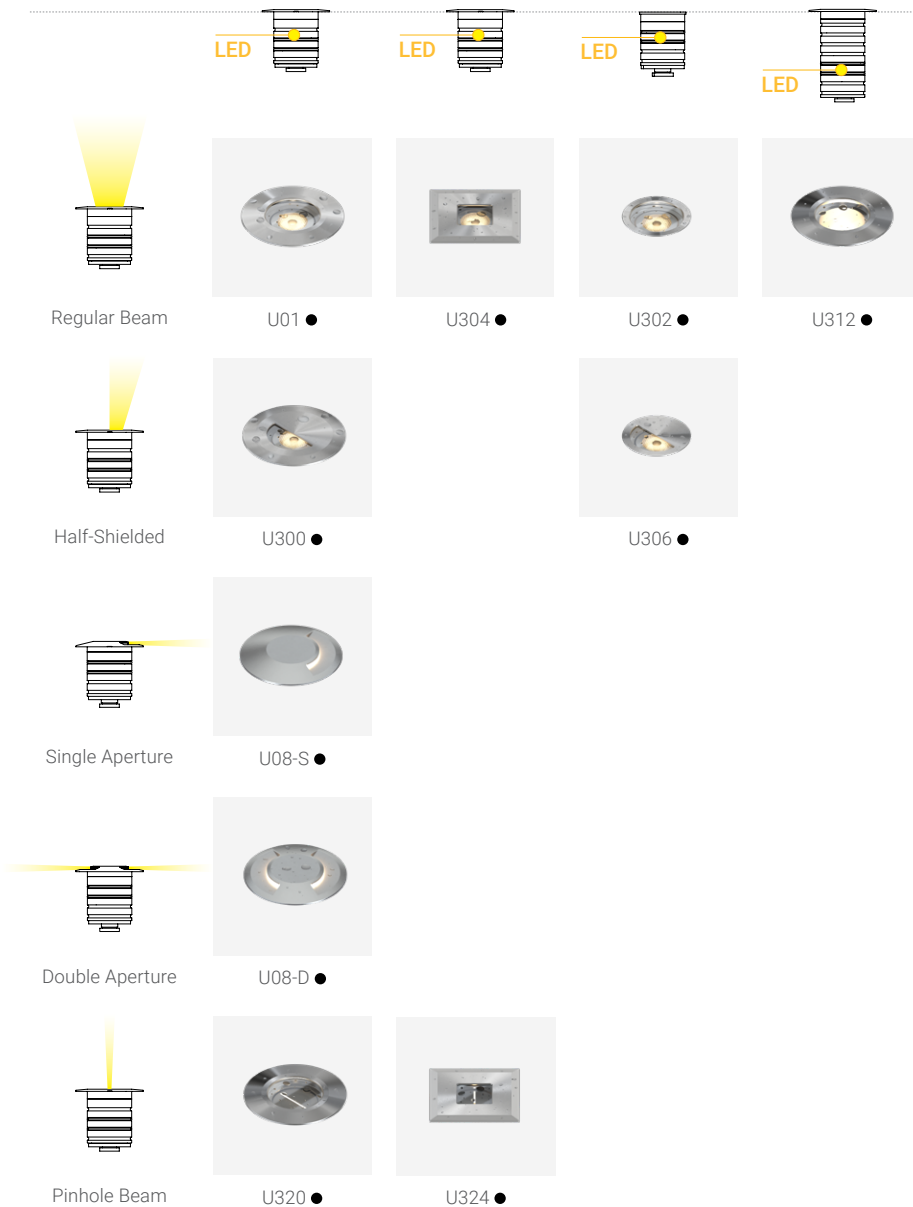

* U312: Only available with Paving Stone Flange

EBX-SGB1-C

SGB1 (MP Lighting Single Gang Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade : For walls and stairs

• Wet, Damp, and Dry location

Components:

1. Plastic Cap
2. Flange - Please see below for flange & material options.
3. Base Plate - Aluminum
4. Box - Stainless Steel 304


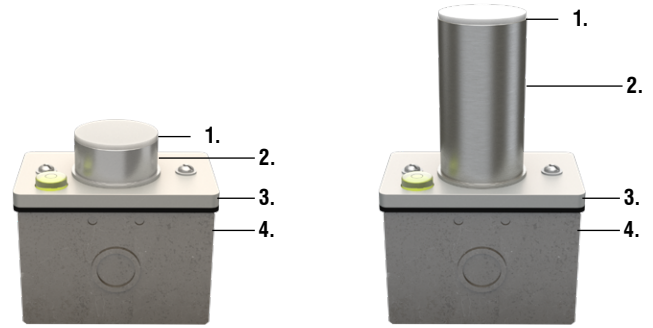


Flange Options & Dimensions


MP Lighting Single Gang Box with Standard Flange



Aluminum Flange (MA)
EBX-SGB1-CSMA

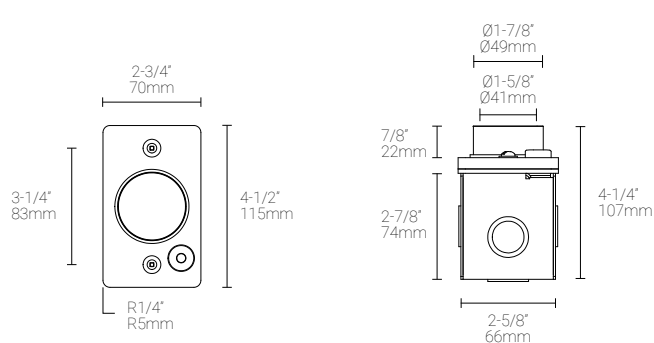


Stainless Steel 316 Flange (S6)
EBX-SGB1-CSS6

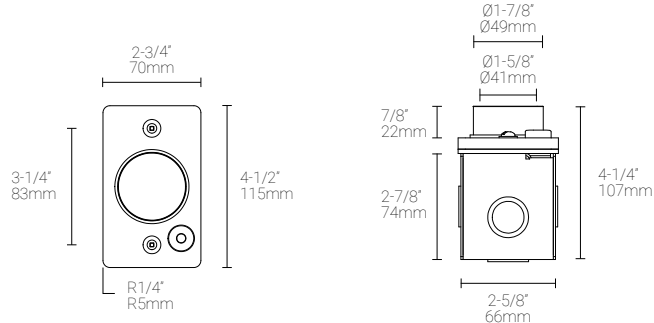

MP Lighting Single Gang Box with Paving Stone Flange



Stainless Steel 316 Flange (S6)
EBX-SGB1-CPS6

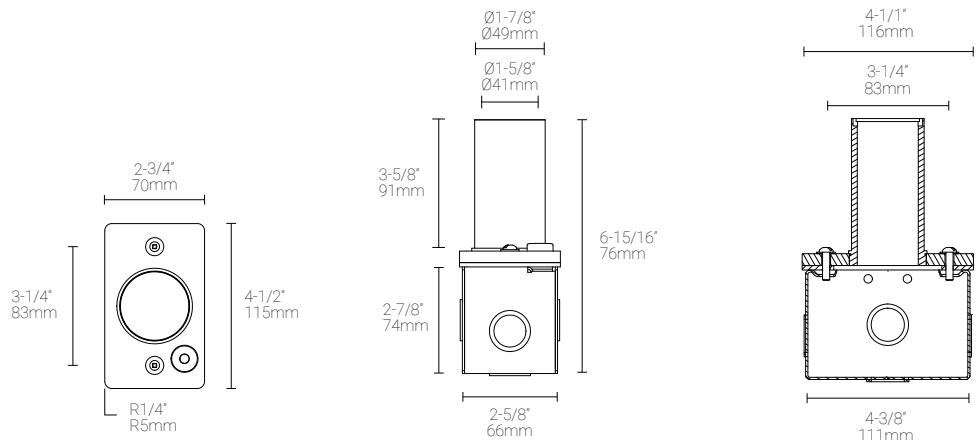

EBX-SGB1-C


SGB1 (MP Lighting Single Gang Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade : For walls and stairs

• Wet, Damp, and Dry location

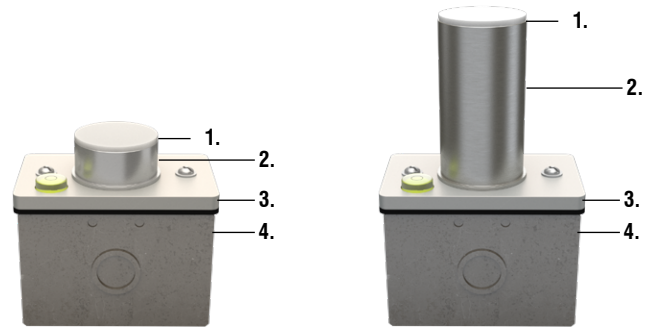

Compatible Fixtures

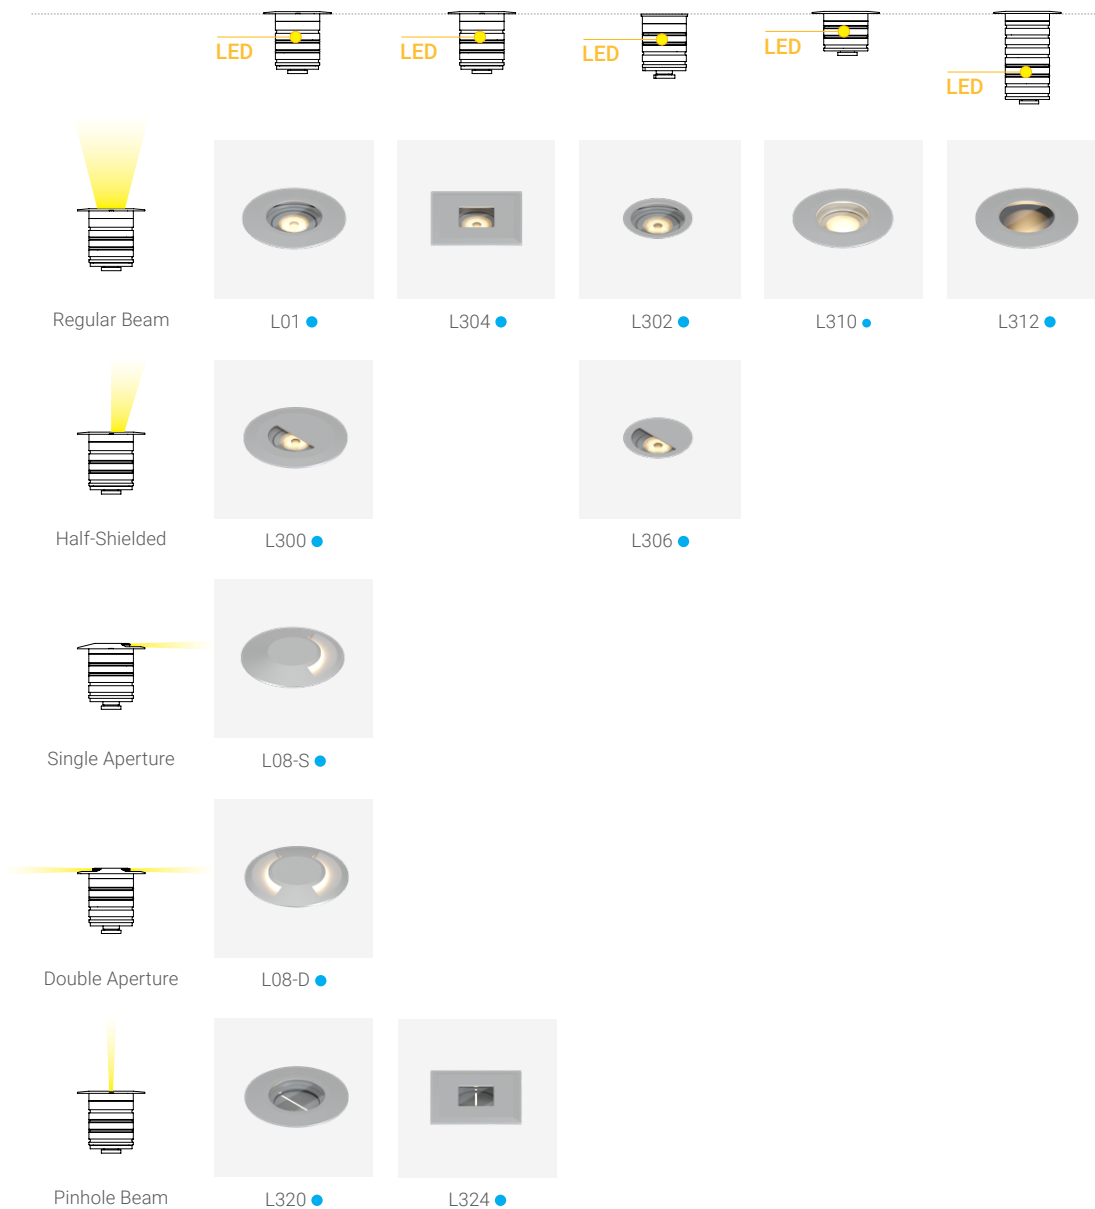

* L312: Only available with Paving Stone Flange

EBX-SFD-C

SFD (Sceptor FD Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)


Inner Diameter: Ø1-5/8" (41mm)

In-grade : For walls and stairs

• Wet, Damp, and Dry location


Components:

1. Plastic Cap
2. Flange - Please see below for flange & material options.
3. Base Plate - Aluminum
4. Box - PVC




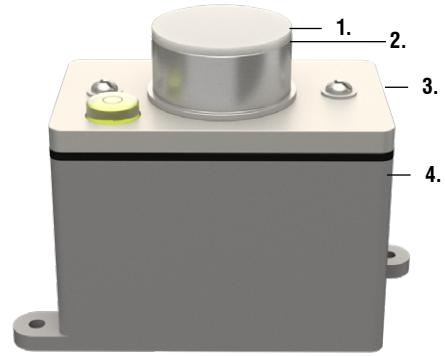


Flange Options & Dimensions





Rectangular Back Box with Standard Flange



Aluminum Flange (MA)
EBX-SFD-CSMA

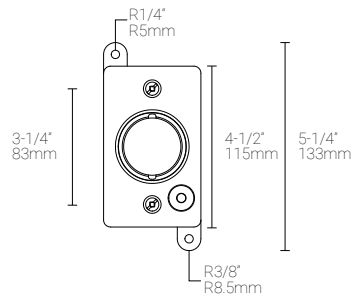



Stainless Steel 316 Flange (S6)
EBX-SFD-CSS6

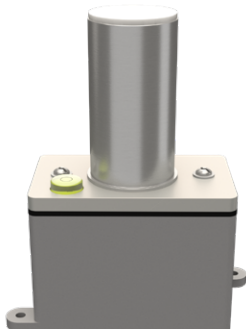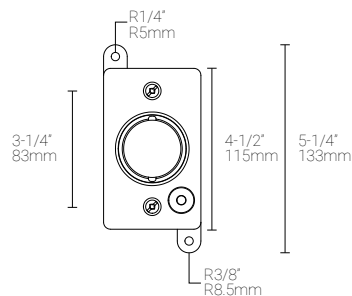

Aluminum Flange (MA)
EBX-SFD-CPMA



Stainless Steel 316 Flange (S6)
EBX-SFD-CPS6

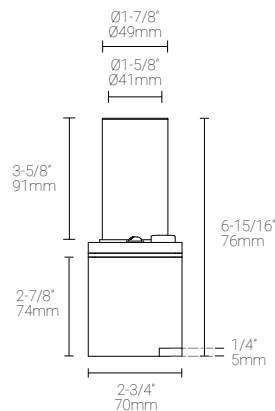

EBX-SFD-C


SFD (Sceptor FD Box) with C flange

Outer Diameter: Ø1-7/8" (49mm)

Inner Diameter: Ø1-5/8" (41mm)

In-grade : For walls and stairs


● Wet, Damp, and Dry location

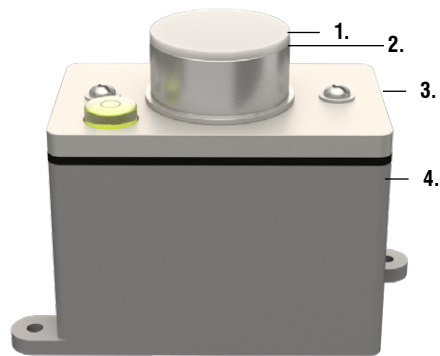


Compatible Fixtures




Regular Beam




L01 ●



L304 ●




L302 ●




L310 ●



Half-Shielded



L300 ●



L306 ●




Single Aperture



L08-S ●



Double Aperture



L08-D ●



Pinhole Beam



L320 ●



L324 ●