

Version	2.0	Date	10/1/2021
Prepared By	C.L.		

PRODUCT SPECIFICATION

Category	LED T8 - Type B (Ballast Bypass)
Item Number	4603
Stock Code	LED10.5T8FR17/840/UNV
Mounting	G13
Housing Color	White + Inner Coated Glass

PICTURE



ELECTRICAL CHARACTERISTICS

Rated Wattage (W)	10.5	Replacement Wattage (W)	F32T8 (4ft)
Tested Wattage (W)	10.5		
Input Voltage (V)	120 ~277	Surge Protect Level	-
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.1 (@120V)	Dimmable	-
Power Factor	>0.9	AUX (12V) Line	No
THD	≤ 20%		

PHOTOMETRIC CHARACTERISTICS

Lumen (lm)	1700	CCT (K)	4000
Efficacy (lm/w)	162	Beam Angle (°)	210
CRI	82		

GENERAL CHARACTERISTICS


Operating Temperature (°F)	-4 ~ 113
Storage Temperature (°F)	-40 ~ 185
IP Rating	UL Dry and Damp Location
Rated Life	50000 hrs.
Warranty	5 years

ACCESSORIES

Item #	Stock Code	Description

PRODUCT DIMENSIONS

Width- in (mm)	1	(25.4mm)
Height- in (mm)	1	(25.4mm)
Depth- in (mm)	47.72	(1212mm)
EPA (ft²)	N/A	
Weight (lbs)	0.45	
Mounting Height (ft)	8 ~ 12	
Cable Length (ft)	-	

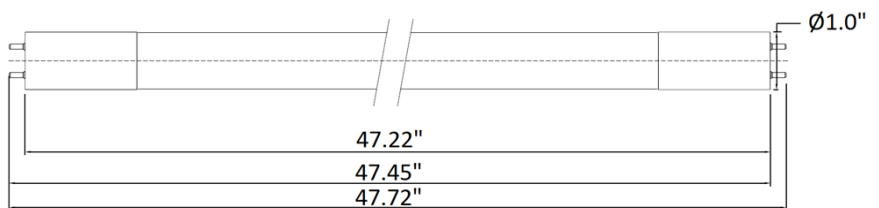

CERTIFICATIONS

UL/ETL	UL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	V5.1 Standard	RoHs	✓

DOCUMENTS

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS
