

LED Flush Mounts

ORTECH

Product Specification Sheet

MODEL 2135-3CCT | 2180-3CCT | 2225-3CCT | 2300-3CCT



HIGHLIGHTS

- Super slim, Built-in Driver, 13mm Thickness LED Flush Mounts available in sizes 4", 6", 9" and 12"
- Magnetic interchangeable colourful rings of your choice (sold separately)
- 3CCT, 120Vac, Triac Dimming
- Can be installed to J-Box or as a recessed fixture



SPECIFICATIONS

Model	2135-3CCT	2180-3CCT	2225-3CCT	2300-3CCT
Wattage	6W	12W	18W	24W
Voltage	AC120V			
Lumens	400lm	840lm	1530lm	2160lm
Beam Angle	120°			
Lifetime	50000 Hours			
CRI	80+			
Dimmable	Triac			
Rating	IC Rated Indoor Use For Damp Location			
Grade of Protection	-20°C to +40°C			
Applications	Corridors Lobbies Kitchens Bedrooms Bathrooms Balconies			
Color Temperature	3000K (warm white) 4000K (natural white) 5000K (cool white)			
Operating Temperature	-20°C to +40°C			
Warranty	5 Years			
Size(mm)	Ø135x13	Ø180x13	Ø225x13	Ø300x13

Trims (sold separately)

Chrome



2135-3CCT-RING CH
2180-3CCT-RING CH
2225-3CCT-RING CH
2300-3CCT-RING CH

Satin Nickel



2135-3CCT-RING SN
2180-3CCT-RING SN
2225-3CCT-RING SN
2300-3CCT-RING SN

Chrome Black



2135-3CCT-RING CBK
2180-3CCT-RING CBK
2225-3CCT-RING CBK
2300-3CCT-RING CBK

Black



2135-3CCT-RING BK
2180-3CCT-RING BK
2225-3CCT-RING BK
2300-3CCT-RING BK

LED Flush Mounts

MODEL 2135-3CCT | 2180-3CCT | 2225-3CCT | 2300-3CCT

EXPANSION FUNCTION

Surface Mount




Retrofit



Multiple Installation possible

MAGNET INSIDE

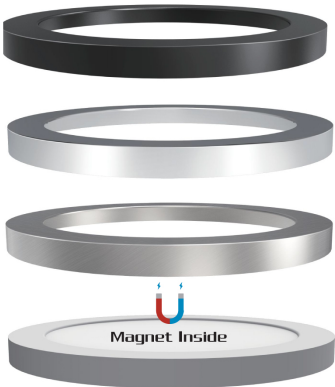

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: