
SPECIFICATION SHEET

TL3539W

3-1/2 INCH SHOWER SERIES TRIM WHITE MATTE RING FROSTED OPAL LENS

TRIM DETAILS

DIMENSIONS-

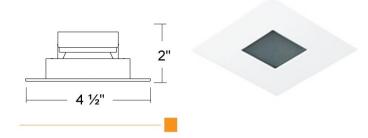

TRIM

Trim is mounted into housing with 2 flexible trim clips. The 3-1/2 Inch aperature provides the perfect amount of light for a commercial or residential application where mounting height is between 8 to 15 foot ceiling height. The subtle beam pattern ensure light is reflected where it's required.

CHOOSE A LAMP

Replaceable 10Watt GU10 LED

PART NUMBER:

LEDGU10FL2700KWH90



90+ CRI 2700K 7.5WATT 120V DIMMABLE LED BULB 50,000 Hrs Warranty

PART NUMBER:

LEDGU10FL3000KWH90





PART NUMBER:

LEDGU10FL2700KBK90



90+ CRI 2700K 7.5WATT 120V DIMMABLE LED BULB 50,000 Hrs Warranty

PART NUMBER:





FIXTURE TYPE:

PROJECT:


PART NUMBER:

NOTES:


CHOOSE A HOUSING

IC-RATED NEW CONSTRUCTION AIR-TIGHT HOUSINGS

H350LGICQA -TALL HOUSING 3-1/2 LED GU10 SERIES




H350LGSICQA -SHALLOW HOUSING 3-1/2 LED GU10 SERIES




IC-RATED RETRO-FIT AIR-TIGHT HOUSINGS

H350LGRICQA -TALL RETRO-FIT HOUSING 3-1/2 LED GU10 SERIES



H350LGSRICQA -SHALLOW RETRO-FIT HOUSING 3-1/2 LED GU10 SERIES



ELECTRICAL RATINGS AND APPROVALS

cULus Rated In Canada or United States Washington State Approved Meets or exceeds ASTM-283 Air-Tight



RATED AT 10 WATTS



- ✓ Insulated Ceilings
- √ Airtight (Some locations may require Vapor Bag)

PART NUMBER EXAMPLE:

TL3539W-LEDGU10FL2700KWH90-H350LGICQA

