


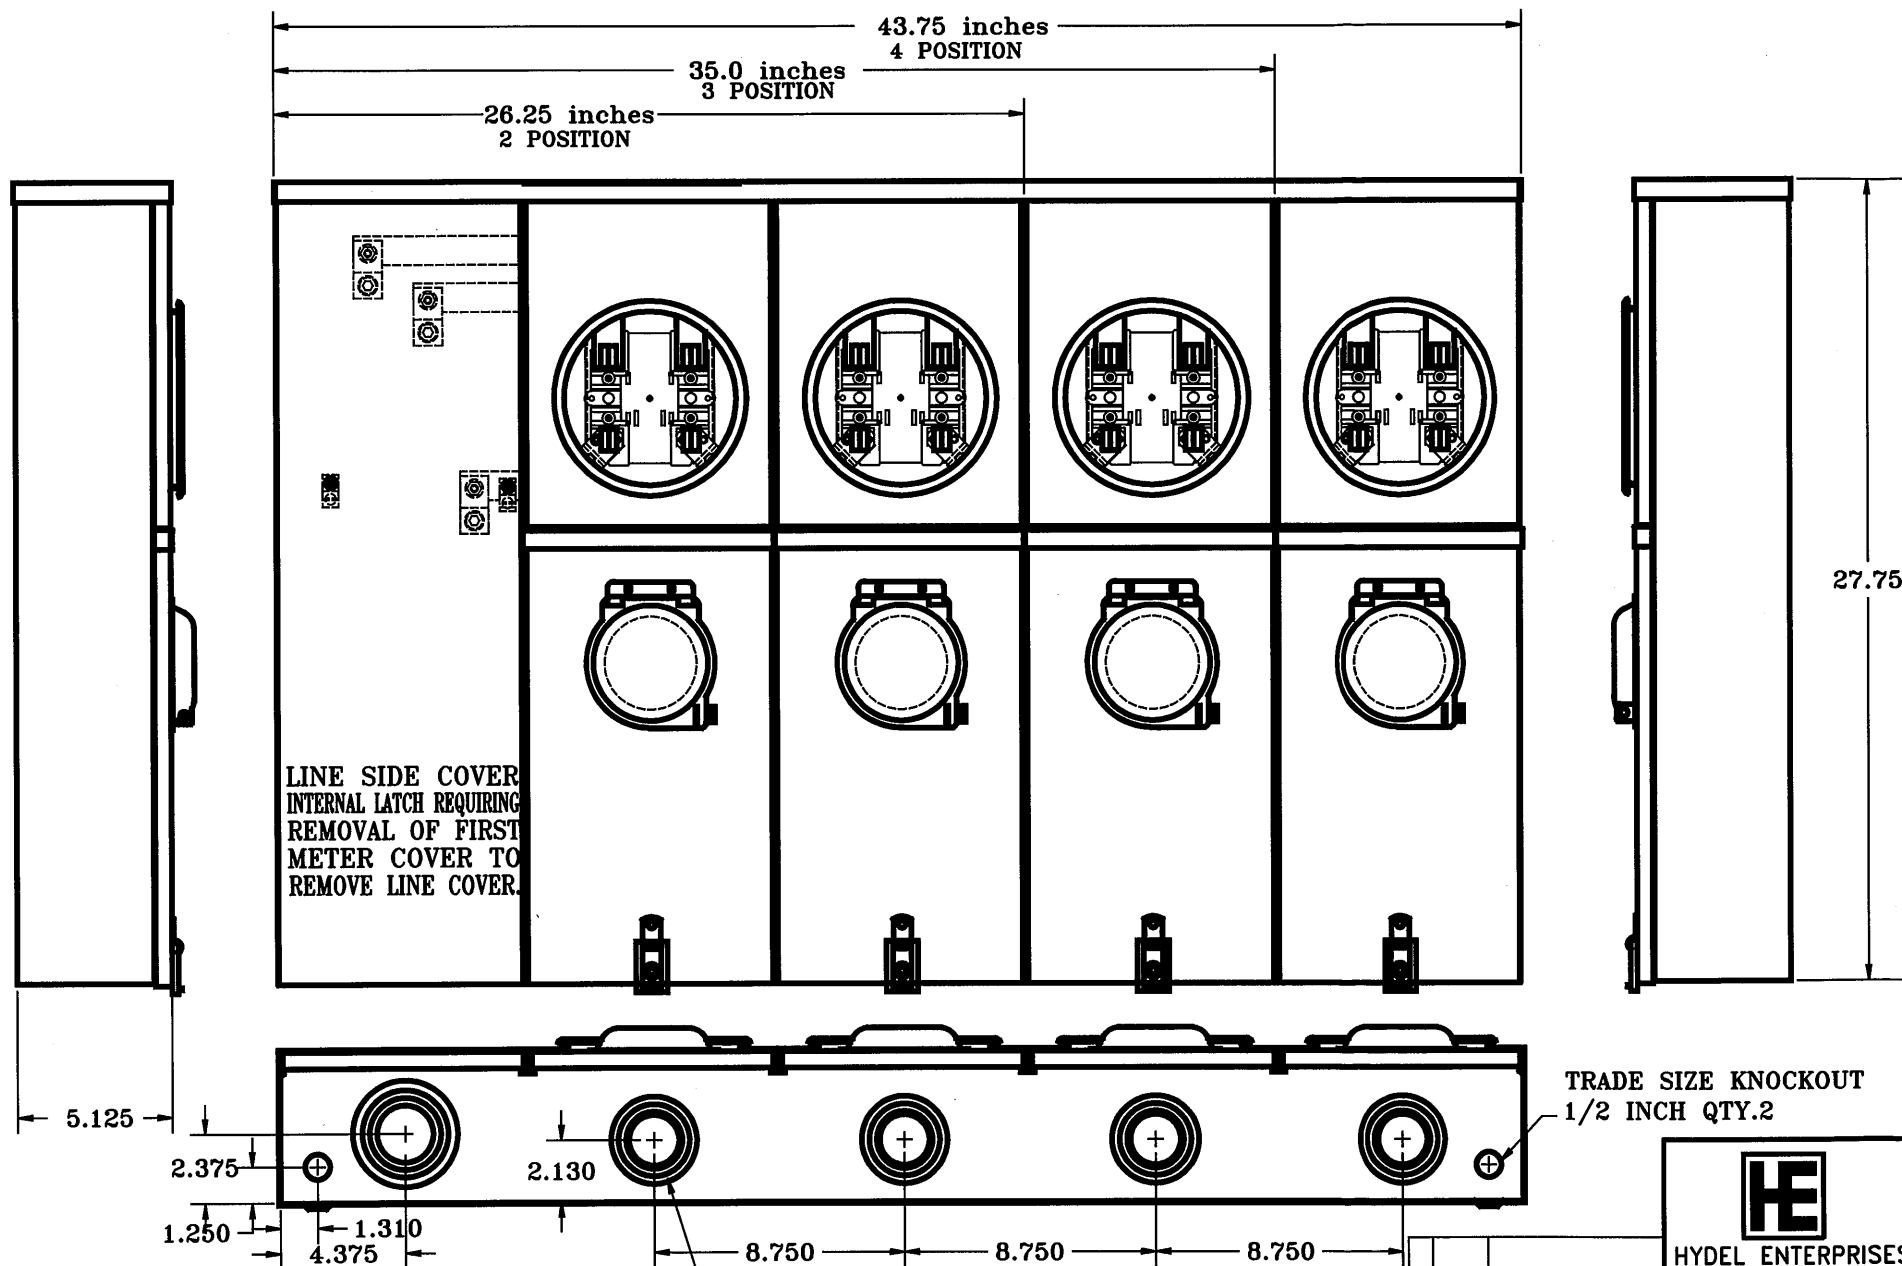

RATING: 200 AMP MAIN 240V MAX.
200 AMP PER POSITION BREAKER GE 200A 240V
LINE LUGS - 250MCM-6 LOAD LUGS - 250MCM-6
INSULATED NEUTRAL GROUNDED c/w BRASS SCREW
FOR UNDERGROUND SERVICE ONLY

TRADE SIZE KNOCKOUTS
1-1/4, 1-1/2, 2, 2-1/2 INCH
QTY.4 2 POS. QTY.5 3POS. QTY.6 4POS.

REV	DATE	CHANGE
DO NOT SCALE		
SCALE:	ALL DIMENSIONS ARE IN INCHES UNLESS NOTED	
DRN BY:	PJS	
DATE:	MAY 10/18	
APP'D BY:	[Signature]	
DATE:		

HE	
HYDEL ENTERPRISES DIVISION OF CIRCA METALS INC. 206 GREAT GULF DRIVE, VAUGHAN	
REV.	SHEET OF
DESCRIPTION 200A MAIN-200A/POS	
MULTI-GANG COMB.METER SOCKET/BREAKER	
PART NO.	JAL22R-24R
DWG. NO.	JAL20R