

Project	Type	Date
---------	------	------



BR-UL2

Solid Brass Inground Uplight with Grate


Finish	Brass
Housing	Die-cast, solid brass.
Lamp Type	MR16 not included
Lamp Holder	Ceramic socket with nickel contacts
Wiring	3' pigtail 18/2 direct-burial cable.
Mounting	Inground Direct Burial
Volts	12Vac
Watts	50W Maximum
Fasteners	All fasteners are stainless steel.
Certification	ETL listed to U.S. and Canadian safety standards for low voltage luminaries (UL 1838).



Design allows for a beam of light through the clear tempered glass lens. The grate offers protection from damage. The BR-UL1 Inground fixture is designed for safety and style on stairways, patios, decks, balcony areas and building perimeters.

Other Finishes

BR-UL2B Black Top

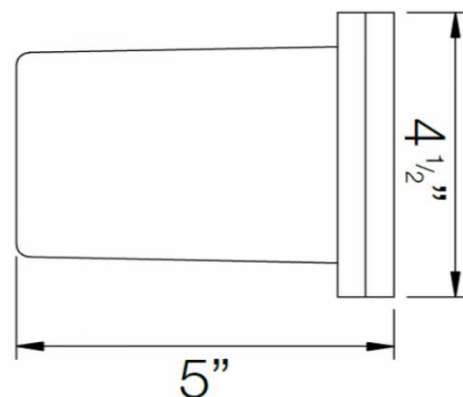

6-5608 Goring St
Burnaby BC, Canada
1-888-739-3555
jaret@axite.ca