

DR630A/DR650A



15W | Up To 1000 Lumens | 3000°K/5000°K



ZOTIA
Your Lighting Supplier!


By Zotia International Trade Ltd.

DR630A/DR450A

DAWN SLIM

6" Round LED Slim Panel, 15W, Airtight

Recess Lighting

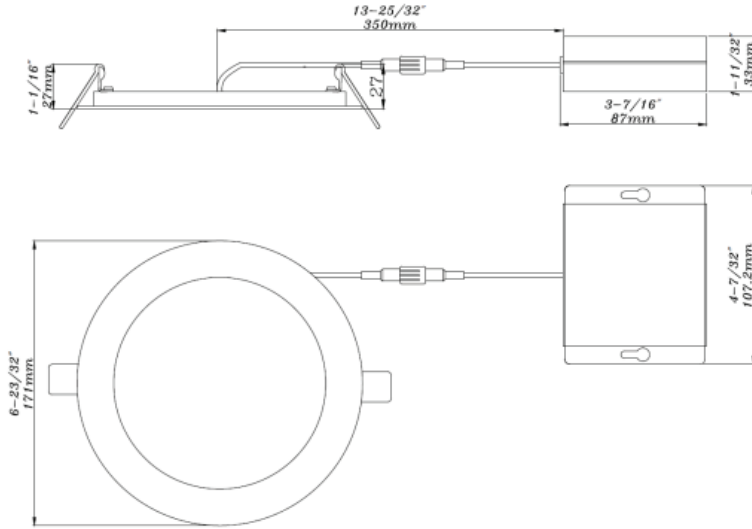

Description

The DR630A/DR650A is a 15 watt 6" slim profile round LED panel. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and streamlined design.

Features

Body

Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare.

LED Characteristics

This general application light fixture features a 15 Watt LED module that maintains uniform intensity producing 975 lumens to 1000 lumens; with a typical CRI of 82. Available in 3000°K /5000°K colour temperature.

Dimming

All DawnRay LED products are designed to be dimmed with both standard dimmers and TRIAC/ELV dimmers. For more information, please check the compatible dimmer list.

Beam Spread

The fixture lens provides 120° beam spread.

Mounting

Includes two spring loaded clips to attach to any ceiling material. The slim profile allows to be mounted under joists or duct work.

LED Driver

Extruded aluminum hardwire box with 210mA dimmable class II electronic LED driver with 100-125V AC input. Includes an 350mm cable from driver to fixture.

Quick Connect push-in terminals

Three "Quick Connect" push-in terminals for fast and easy wiring.

Operating Temperature

-20°C~40°C (-4°F~104°F)

Environment

Suitable for damp locations, wet locations, and insulated ceiling applications.

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

SPECIFICATION	
Application	Ceiling Recess Mount
Approved Location	Damp / Wet / Insulated Ceiling
Beam Angle	120°
CCT	3000°K / 5000°K
Certification	cETLus
Class II	Yes
Colour	WHITE
CRI	82
Dimming	100%-10%
Dimming Tech	Standard and TRIAC/ELV
Energy Star	Yes
Input	100-125V AC, 60Hz, 0.09A
LM 79	Yes
LM 80	Yes
Lumens	975 / 1000
Lumens per Watt	Min: 54.4 Max: 60
Power Factor	>0.95
Projected Life	70% @ 50,000 hrs
Warranty	5yrs
Wattage	15W
Cut-size	6-1/8"