


# TIKI LED AREA LIGHT

6041/6042

WAC

LANDSCAPE LIGHTING



Fixture Type:

Catalog Number:

Project:

Location:

## PRODUCT DESCRIPTION



Sturdy side mount design works well in applications where directional illumination is desired

## SPECIFICATIONS

**Input:** 9-15VAC (Transformer is required)  
**Power:** 6.5W / 9.5VA  
**Brightness:** 225 lm  
**CRI:** 90+  
**Rated Life:** 60,000 hours

## FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Solid diecast corrosion resistant aluminum alloy
- Recommended spacing for installation: Residential: 7 to 9ft; Commercial: 5 to 7ft
- Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts are included
- Maintains constant lumen output against voltage drop
- UL & CUL 1838 Listed

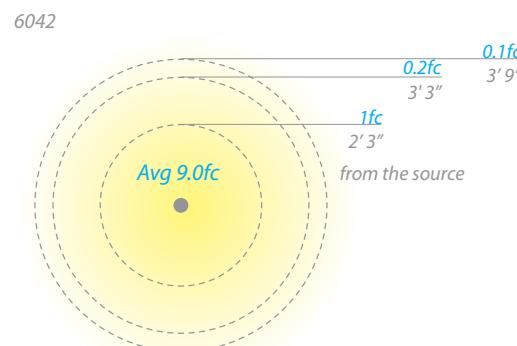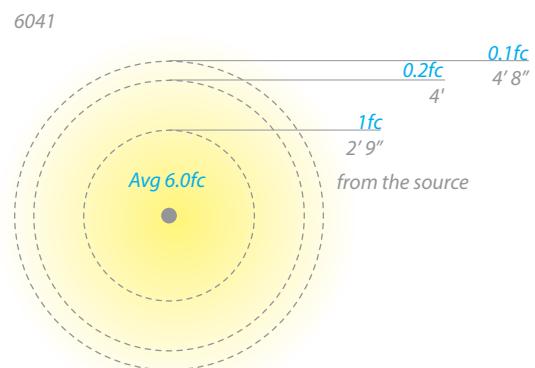

## ORDERING NUMBER

		Color Temp	Finish
6041	Tiki	27 2700K Warm White	BK Black on Aluminum
6042		30 3000K Pure White	BZ Bronze on Aluminum

6042-    BK

Example: 6042-30BK

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

Surface Mount Flange/Stake



*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*

**5000-SCP-BZ***Bronze on Aluminum*

Additional Mounting Stake

**9000-ST9-BK***Durable PVC stake*

Guardian Mount



*Heavy duty stainless steel spike to position fixture.  
Formed from a single piece of metal*

**9000-SP9-BZ***Stainless Steel*

Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed  
See transformer spec sheet for details and its accessories*

**9075-TRN-SS**  
75W Max

**9150-TRN-SS**  
150W Max

**9300-TRN-SS**  
300W Max

**9600-TRN-SS**  
600W Max

