

1/ Integrated T5 LED (Linkable)

VO-T5FIXW5FT1-120-35-S-D / VO-T5FIXW5FT1-120-50-S-D
VO-T5FIXW9FT2-120-35-S-D / VO-T5FIXW9FT2-120-50-S-D



LED Fixture




Power Cord
(Sell Separately)



connecting cable
(Sell Separately)




1.2M power cord with plug on
one end and another male end
(Sell Separately)



wire box with female end & on/off switch
(Sell Separately)

2/ HARDWARE CONTENTS



x2 Mounting Screws (4x22mm)



x2 Clips



x2 Mounting Screws (4x16mm)




x2 Roll plug



female end cap

3/ ASSEMBLY INSTRUCTIONS

1. Drill two holes at the desired location on the wall (the holes should be near the two ends of the T5 fixture). Then put the roll plugs in the holes.
2. Select suitable size of screws and then put the clip on the screw, then screw in both screws and clips into the roll plug.
3. Make sure the clips are installed in place tightly. Then click the T5 fixture in the clips.
4. Linking options
For 1ft (300mm)T5 fixture, you can link 16pcs at maximum.
For 2ft (600mm)T5 fixture, you can link 9 pcs at maximum.
5. If the T5 fixtures are installed on different horizontal line.
You can use the connecting cable to connect the two T5 fixtures.
Make sure everything is connected properly.
Put the female end cap at the end of last T5 fixture.
Connect the power cord with the male end of first T5 fixture.
Then connect with the power.

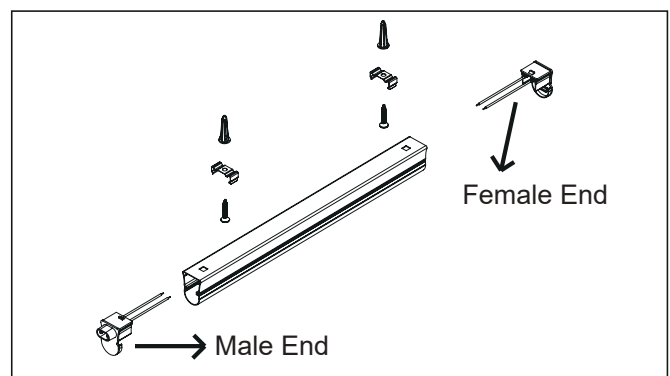

4/ COMPATIBLE DIMMER LIST

Dimmer Brand	Model#
Lutron	DVCL-153PLH
Leviton	6681
Lutron	S600-P
Lutron	DV600-P15
Leviton	6674
MACL	153M
Lutron	PD-6WCL